

Evo5DLF



Evo5 Dryer Light Finisher

Vianord offers this solution to combine in a unique unit the dryer and light finisher sections. This unit is available for plates size up to 132 x 203 cm (52x80 inch).


DRYER SECTION

- 60 Celsius degree hot air (140 degree Fahrenheit)
- 6 drawers with individual timers
- 3 heating sections with separate temperature control and air circulation (2 drawers each)
- Uniform temperature for excellent drying result
- Safety thermostat in every section
- Exhaust system integrated
- Safety device for exhaust control
- Touch screen operator display
- Programmable unit warm up
- Automatic switch off after last plate


LIGHT FINISHER SECTION:

- UVA + UVC lamps for post exposure and light finishing
- Programmable operation: simultaneous/separate/sequential
- Separate timers for UVA and UVC
- Automatic plate cooling with programmable time
- 24 programmable channels for different plate types
- Powerfull air exhaust with delayed stop for safe zone extraction
- Fiber optic lamp failure detectors
- Exhaust system integrated
- Touch screen operator display



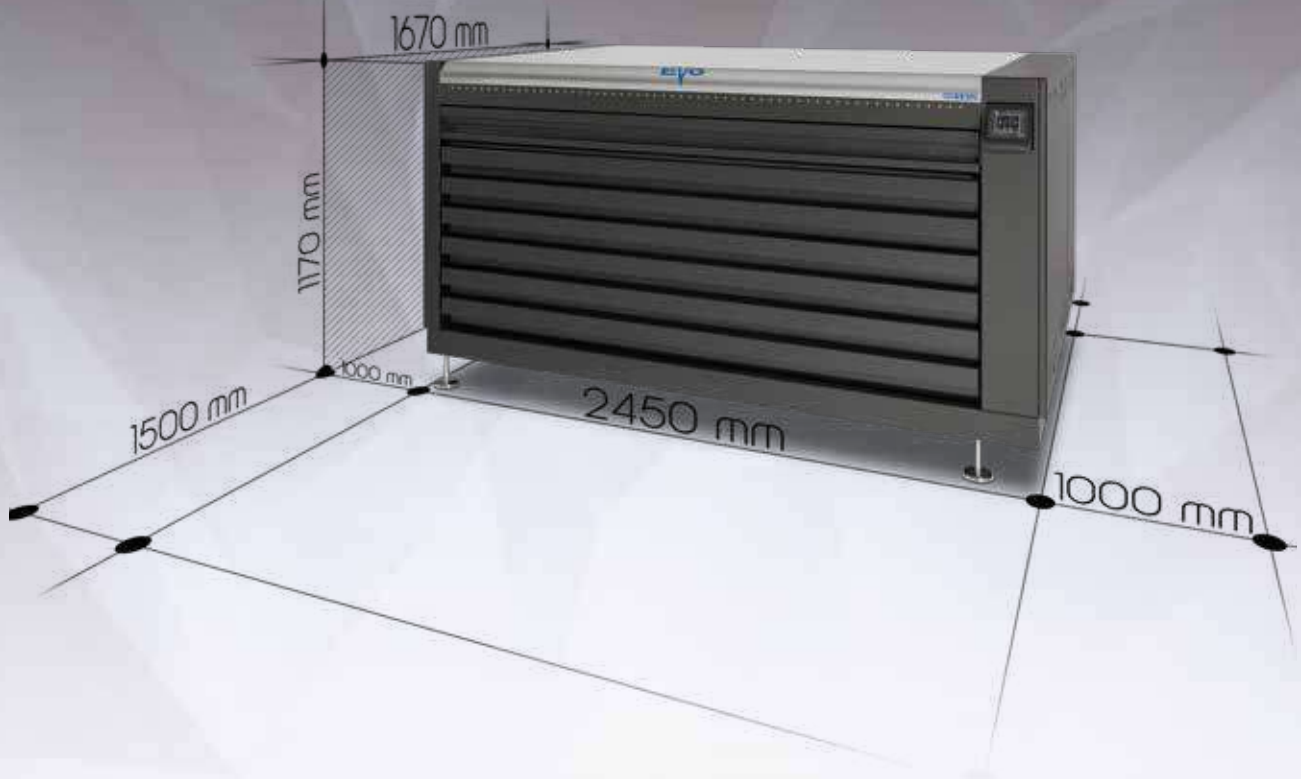

Dimensions LxWxH

 1670 x 2450 x 1170 mm
65.7 x 96.5 x 49.6 inches

Power supply



 400V 3PH/N/PE 50/60Hz 9.5kW 15A
230V 3PH/PE 50/60Hz 9.5kW 26A


Plate thickness

 Up to 7 mm / 0.276 inch

Solvent

 n/a


Packaging dimensions

 2780 x 1950 x 1930 mm | 1.350 Kg

Weight

1040 kg | 2292 pounds 


Maximum plate size

132 x 203 cm | 52 x 80 inches 


Compressed air supply

n/a 

Exhaust

1 x 80 mm Ø - 100 m³/h
2 x 140 mm Ø - 600 m³/h 

Remote monitoring

Optional 



Vianord
engineering
www.vianord.com
info@vianord.com

© 2015 Vianord. All rights reserved. The Vianord Logo®, Easy to Plate™ and Evo™ are registered trademarks or trademarks of Vianord Engineering SAS or its affiliates. All technical information set out herein is provided free of charge and is based on technical data, which Vianord believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Vianord Engineering SAS reserves the right to change the specifications of its products at any time. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.